

Ändra kanal för det trådlösa nätverket


Den här guiden beskriver hur du ändrar kanal för det trådlösa nätverket. Modemet som används är Xavi 5258. Guiden förutsätter att modemmet är kopplat direkt till datorn med kabel.

OBS! Innan du påbörjar guiden behöver du ställa in din dator för hårdställd ipadress. På föregående sida finns en guide som beskriver hur du gör för ditt operativsystem. När du är utfört instruktionerna i den guiden kan du fortsätta med stegen nedan.

1. Öppna din webbläsare.




2. I adressfältet fyller du i adressen 192.168.1.1

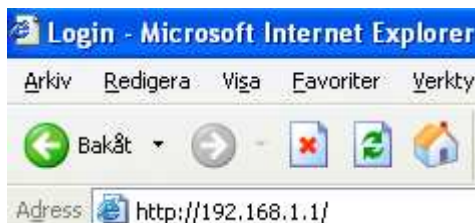

3. Klicka på "Enter" eller "Gå till".



- I fältet för "Username" fyller du i "user".
I fältet för "Password" fyller du i "user".
Klicka sedan på "Log In".

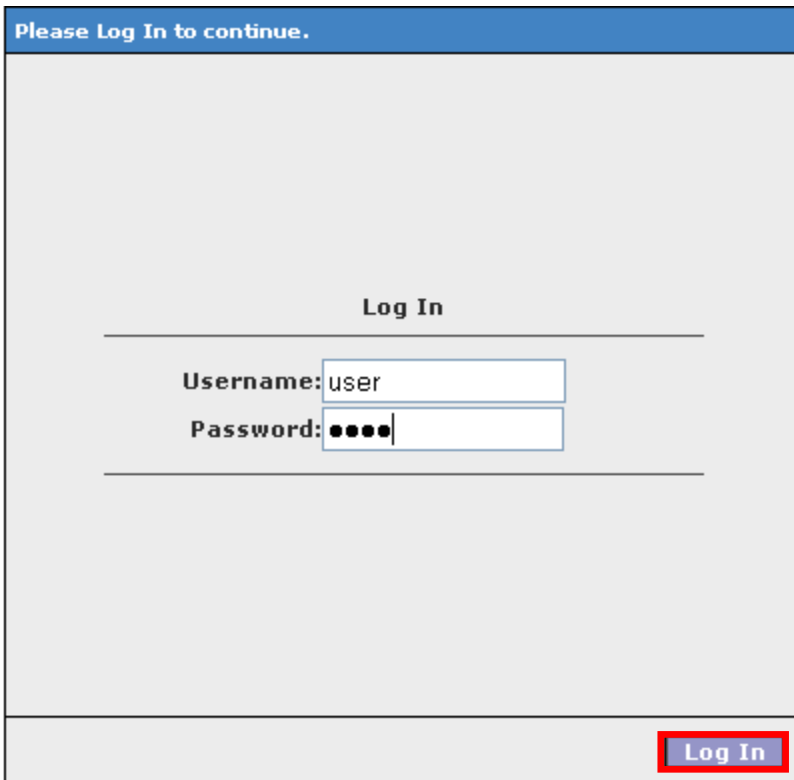

Please Log In to continue.

Log In

Username:


Password:

Log In

- Klicka på "Setup" i menyn till vänster.




6. I fältet för "Channel B/G" fyller du i den kanal som du vill ändra till. Du kan ändra till en kanal mellan 1-13. Klicka sedan på "Apply"

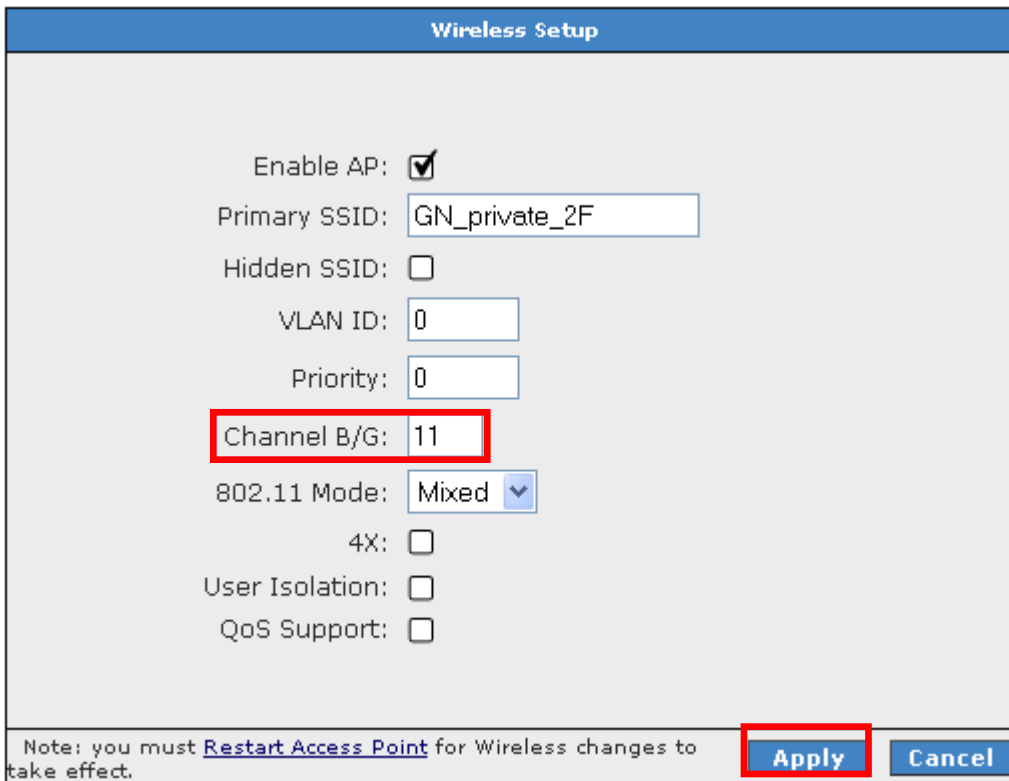





The image shows a "Wireless Setup" configuration window. The "Channel B/G" field is highlighted with a red box and contains the value "11". The "Apply" button at the bottom right is also highlighted with a red box. Other fields include "Enable AP" (checked), "Primary SSID" (GN_private_2F), "Hidden SSID" (unchecked), "VLAN ID" (0), "Priority" (0), "802.11 Mode" (Mixed), "4X" (unchecked), "User Isolation" (unchecked), and "QoS Support" (unchecked). A note at the bottom states: "Note: you must [Restart Access Point](#) for Wireless changes to take effect."

7. Klicka på "Restart Access Point".







The image shows a close-up of the bottom of the configuration window. The "Restart Access Point" link is highlighted with a red box. The "Apply" and "Cancel" buttons are also visible.


8. Klicka på "Save All".

System Commands	
System Commands allow you to carry out basic system actions. Press the button to execute a command.	
	Press this button in order to permanently save the current configuration of the Gateway. If you do restart the system without saving your configuration, the Gateway will revert back to the previously saved configuration.
	Use this button to restart the system. If you have not saved your configurations, the Gateway will revert back to the previously saved configuration upon restarting. NOTE: Connectivity to the unit will be lost. You can reconnect after the unit reboots.
	Use this button to restart the Wireless Access Point. It is important to Restart Access Point any time you change your Wireless settings.
	Use this button to restore factory default configuration. NOTE: Connectivity to the unit will be lost. You can reconnect after the unit reboots.


9. Klicka på "Restart Access Point".

System Commands	
System Commands allow you to carry out basic system actions. Press the button to execute a command.	
	Press this button in order to permanently save the current configuration of the Gateway. If you do restart the system without saving your configuration, the Gateway will revert back to the previously saved configuration.
	Use this button to restart the system. If you have not saved your configurations, the Gateway will revert back to the previously saved configuration upon restarting. NOTE: Connectivity to the unit will be lost. You can reconnect after the unit reboots.
	Use this button to restart the Wireless Access Point. It is important to Restart Access Point any time you change your Wireless settings.
	Use this button to restore factory default configuration. NOTE: Connectivity to the unit will be lost. You can reconnect after the unit reboots.

10. Klicka på "OK".

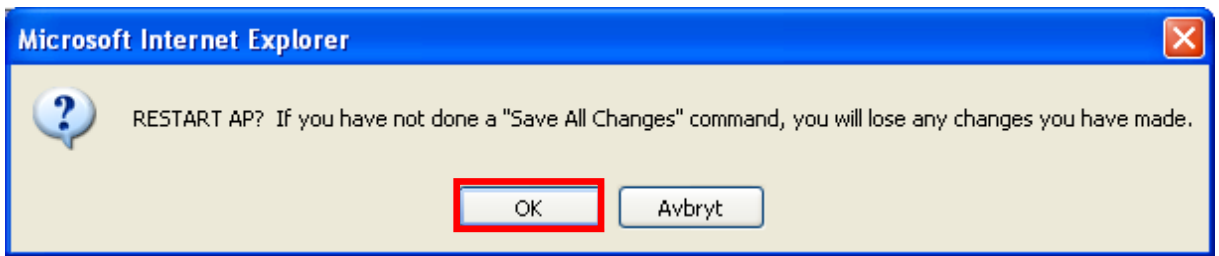

11. Modemet startar om med de nya inställningarna.

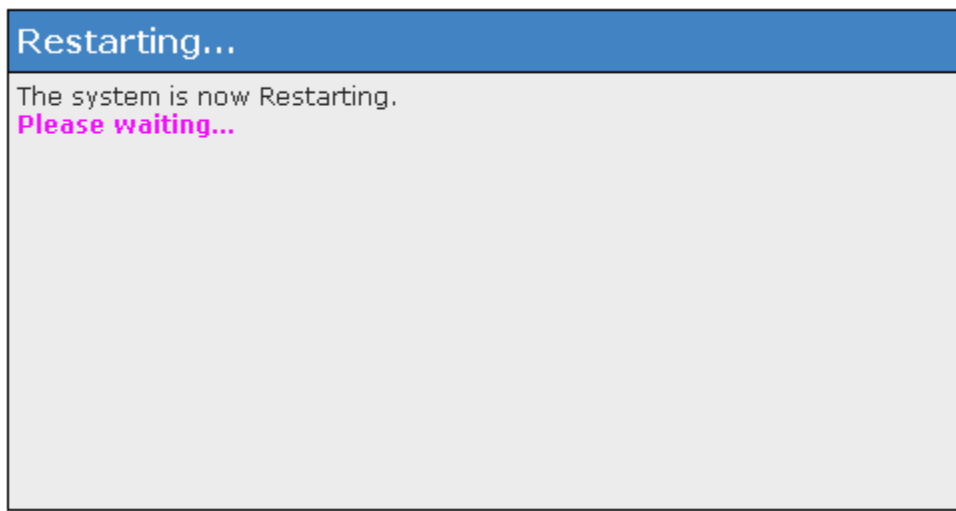

12. Du har nu bytt kanal på det trådlösa nätverket.