

Billion BiPAC 7202SL Bryggning av modem

Denna guide visar hur du bryggar modemmet för att göra det redo för att ansluta exempelvis en router.

OBS! Efter denna guide kommer du inte längre komma åt webbgränssnittet genom adressen nedan utan måste fabriksåterställa modemmet för att återfå tillgång till modemmet. Se separat guide för detta.


OBS! Om du skall ansluta med "Fast IP" efter bryggningen måste du **innan** denna guide göra en fabriksåterställning på modemmet. Se separat guide för detta.

1. Anslut till modemets webbgränssnitt genom din webbläsare via adressen <http://192.168.1.254>

Om du får upp en inloggningsruta så loggar du in med följande uppgifter:

Användarnamn: admin

Lösenord: admin

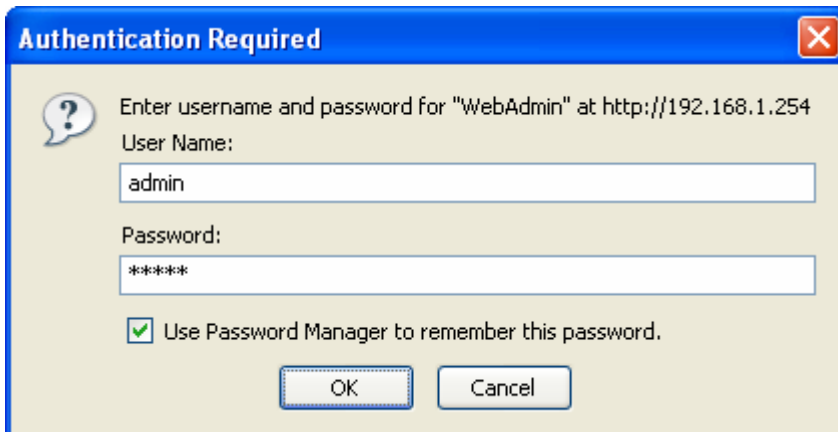

Authentication Required

Enter username and password for "WebAdmin" at <http://192.168.1.254>


User Name:
admin

Password:

Use Password Manager to remember this password.

OK Cancel

2. På förstasidan klickar du på "Quick Start" i menyn till vänster.

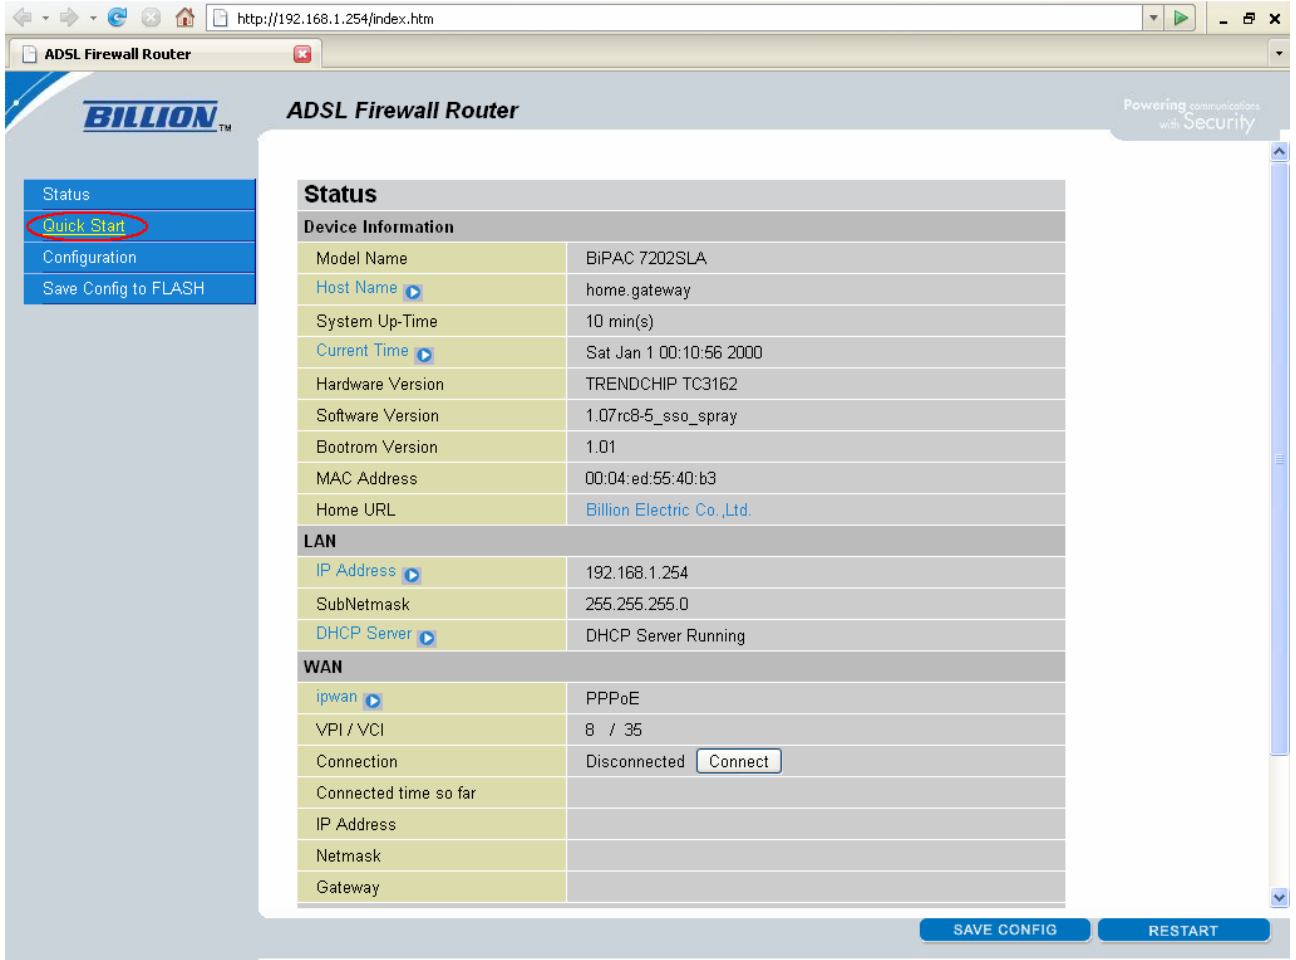

The screenshot shows the web interface of a Billion ADSL Firewall Router. The browser address bar displays `http://192.168.1.254/index.htm`. The page title is "ADSL Firewall Router". On the left sidebar, the "Quick Start" menu item is highlighted with a red circle. The main content area displays the "Status" page, which includes the following information:


Device Information	
Model Name	BiPAC 7202SLA
Host Name	home.gateway
System Up-Time	10 min(s)
Current Time	Sat Jan 1 00:10:56 2000
Hardware Version	TRENDCHIP TC3162
Software Version	1.07rc8-5_sso_spray
Bootrom Version	1.01
MAC Address	00:04:ed:55:40:b3
Home URL	Billion Electric Co.,Ltd.

LAN	
IP Address	192.168.1.254
SubNetmask	255.255.255.0
DHCP Server	DHCP Server Running

WAN	
ipwan	PPPoE
VPI / VCI	8 / 35
Connection	Disconnected <input type="button" value="Connect"/>
Connected time so far	
IP Address	
Netmask	
Gateway	

At the bottom right of the interface, there are two buttons: "SAVE CONFIG" and "RESTART".

3. På denna sida väljer du "Pure Bridged LLC" i listan märkt "Encapsulation".

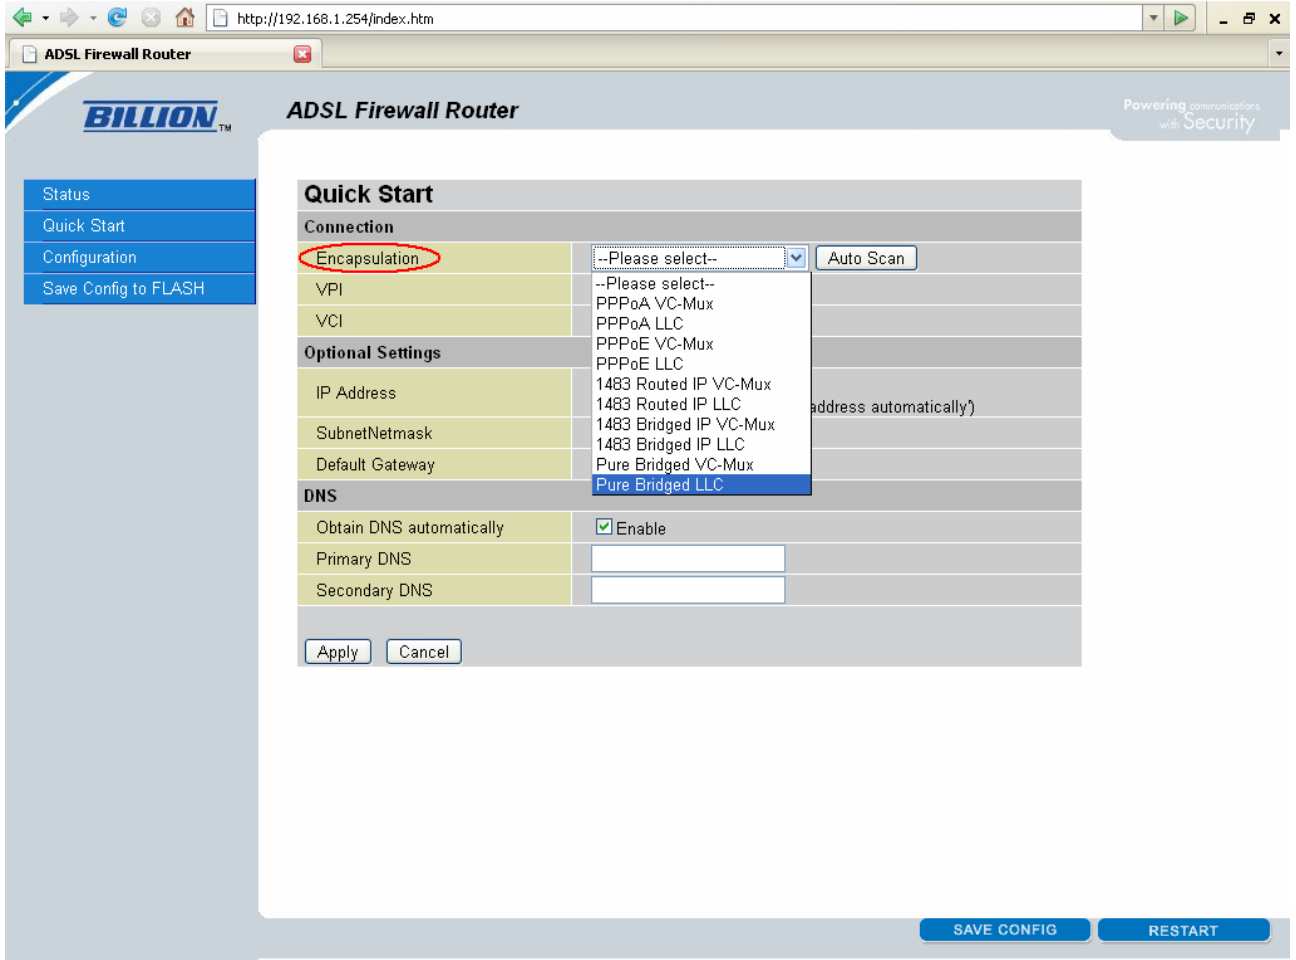


The screenshot shows the configuration interface for a BILLION ADSL Firewall Router. The browser address bar shows `http://192.168.1.254/index.htm`. The page title is "ADSL Firewall Router" and the logo "BILLION™" is visible. A navigation menu on the left includes "Status", "Quick Start", "Configuration", and "Save Config to FLASH". The main content area is titled "Quick Start" and contains several sections:

- Connection**: Includes a dropdown menu for "Encapsulation" (circled in red) with an "Auto Scan" button. The dropdown menu is open, showing options: "--Please select--", "PPPoA VC-Mux", "PPPoA LLC", "PPPoE VC-Mux", "PPPoE LLC", "1483 Routed IP VC-Mux", "1483 Routed IP LLC", "1483 Bridged IP VC-Mux", "1483 Bridged IP LLC", "Pure Bridged VC-Mux", and "Pure Bridged LLC" (highlighted in blue).
- Optional Settings**: Includes fields for "IP Address", "SubnetNetmask", and "Default Gateway".
- DNS**: Includes a checkbox for "Obtain DNS automatically" (checked), and input fields for "Primary DNS" and "Secondary DNS".

At the bottom right, there are buttons for "SAVE CONFIG" and "RESTART".

4. Kontrollera att inställningarna är korrekt ifyllda enligt skärmbilden nedan. Klicka sedan på "Apply".

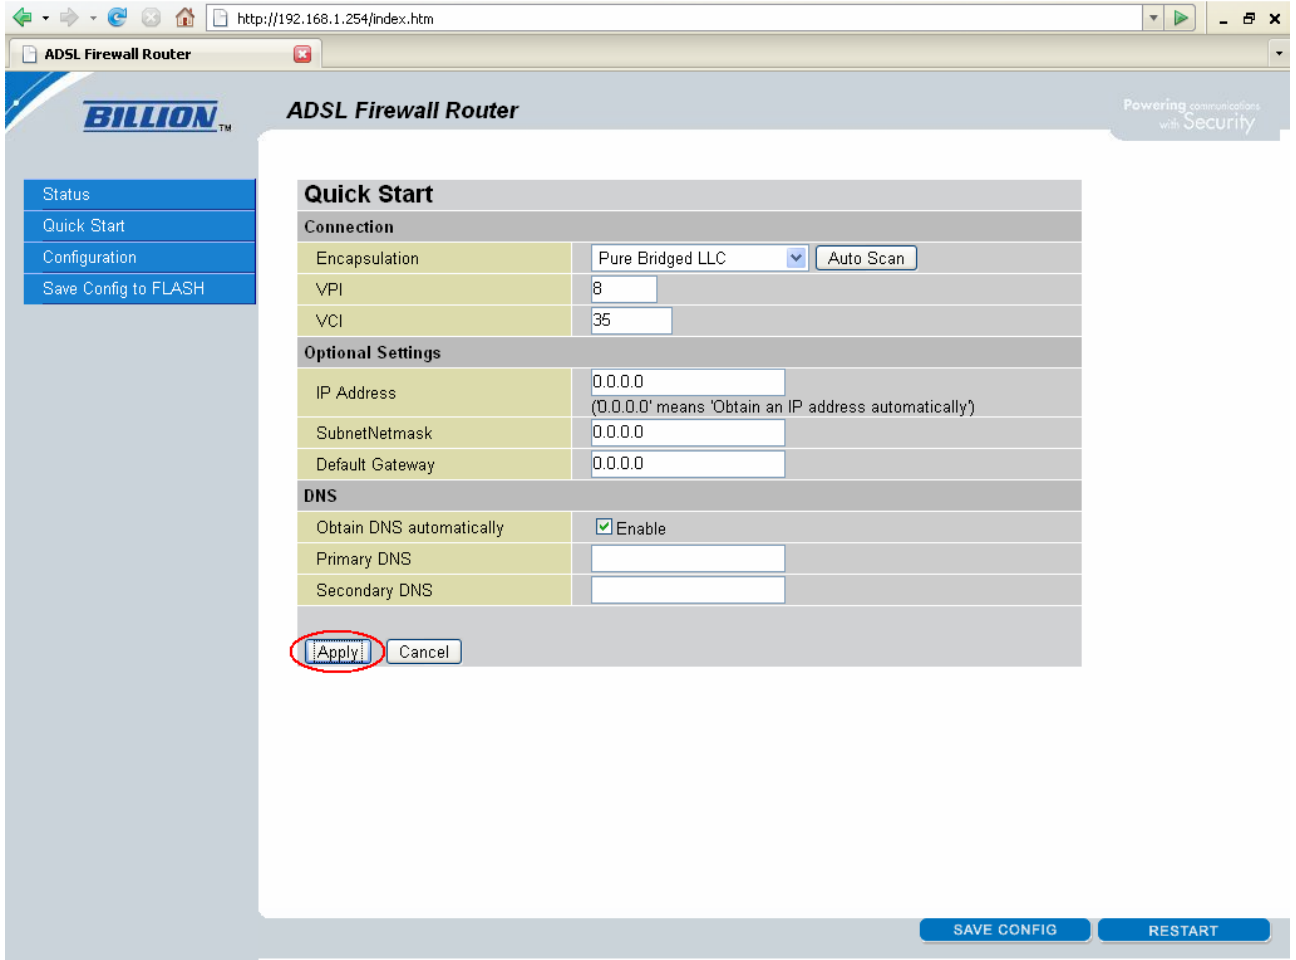

The screenshot shows the configuration interface for a BILLION ADSL Firewall Router. The browser address bar shows `http://192.168.1.254/index.htm`. The page title is "ADSL Firewall Router". On the left, there is a navigation menu with "Quick Start" selected. The main content area is titled "Quick Start" and contains the following settings:

Connection	
Encapsulation	Pure Bridged LLC <input type="button" value="Auto Scan"/>
VPI	8
VCI	35

Optional Settings:

IP Address	0.0.0.0 <small>(0.0.0.0 means 'Obtain an IP address automatically')</small>
SubnetNetmask	0.0.0.0
Default Gateway	0.0.0.0


DNS:

Obtain DNS automatically	<input checked="" type="checkbox"/> Enable
Primary DNS	
Secondary DNS	

At the bottom of the form, there are two buttons: "Apply" (circled in red) and "Cancel". At the bottom right of the page, there are two buttons: "SAVE CONFIG" and "RESTART".


5. Om du får upp en konfirmationsruta så behöver modemmet startas om för att inställningarna skall sparas. Klicka på "OK" och låt modemmet automatiskt starta om.

OBS! Om du **inte** får upp denna konfirmationsruta så behöver du manuellt spara inställningarna till modemets minne. Se nedan för instruktioner hur du gör detta.

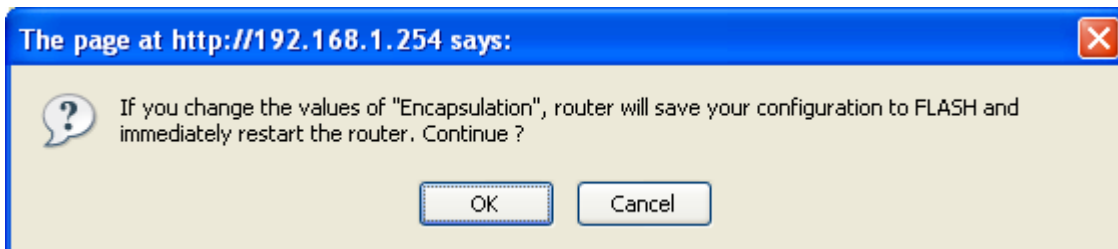

The screenshot shows a confirmation dialog box with a blue title bar that reads "The page at `http://192.168.1.254` says:". The main text of the dialog is: "If you change the values of "Encapsulation", router will save your configuration to FLASH and immediately restart the router. Continue?". At the bottom of the dialog, there are two buttons: "OK" and "Cancel".

För att inställningarna ska ligga kvar efter du stängt av modemmet måste de sparas till minnet. Klicka på "Save Config" nere till höger.

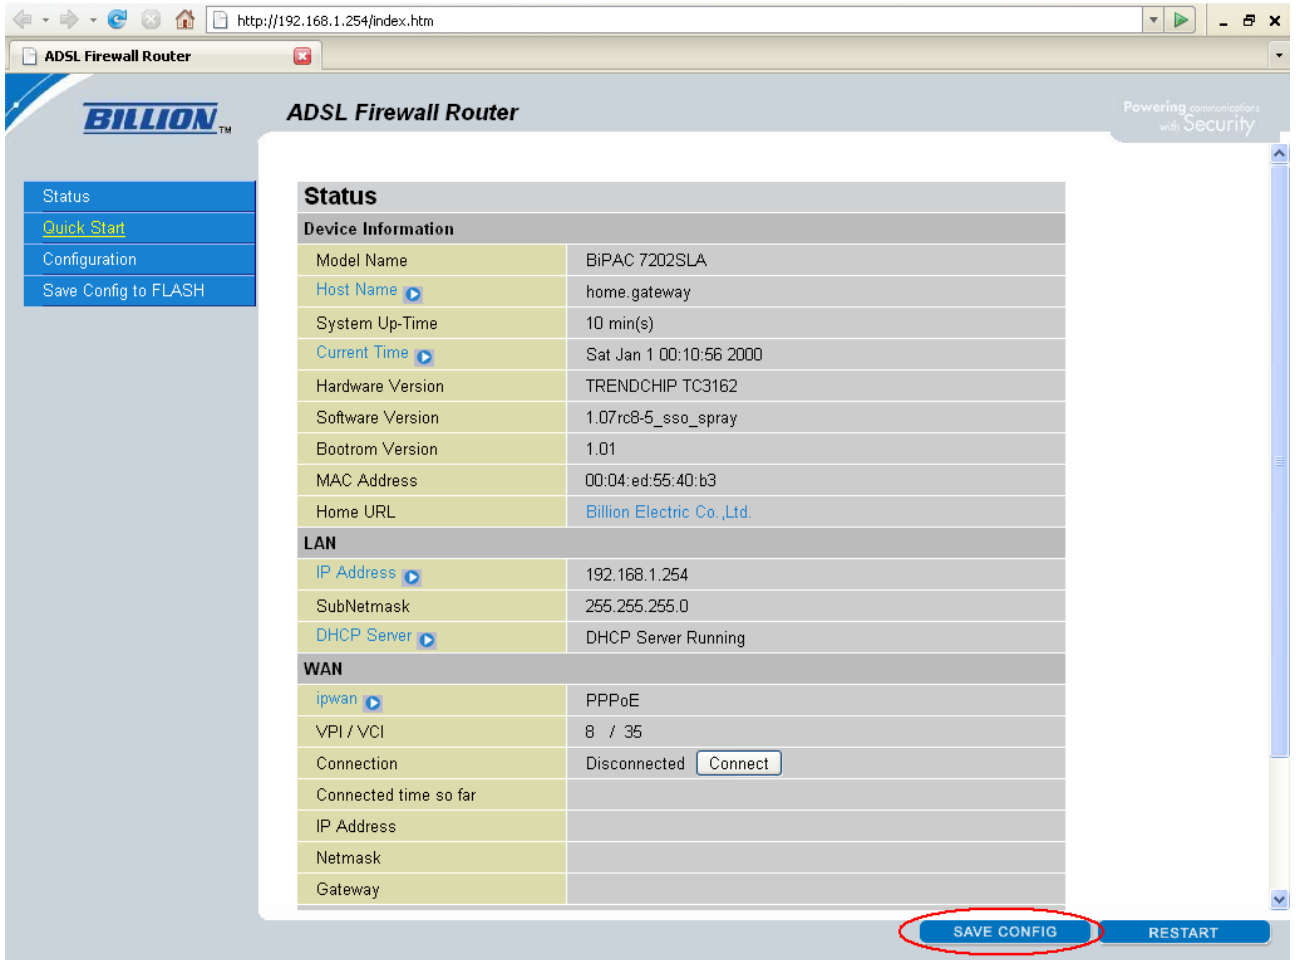

The screenshot shows the web interface of a Billion ADSL Firewall Router. The browser address bar shows `http://192.168.1.254/index.htm`. The page title is "ADSL Firewall Router". The interface includes a navigation menu on the left with options: Status, Quick Start, Configuration, and Save Config to FLASH. The main content area displays the "Status" page, which is organized into sections: Device Information, LAN, and WAN. The "SAVE CONFIG" button at the bottom right is highlighted with a red circle.


Device Information	
Model Name	BIPAC 7202SLA
Host Name	home.gateway
System Up-Time	10 min(s)
Current Time	Sat Jan 1 00:10:56 2000
Hardware Version	TRENDCHIP TC3162
Software Version	1.07rc8-5_sso_spray
Bootrom Version	1.01
MAC Address	00:04:ed:55:40:b3
Home URL	Billion Electric Co.,Ltd.

LAN	
IP Address	192.168.1.254
SubNetmask	255.255.255.0
DHCP Server	DHCP Server Running

WAN	
ipwan	PPPoE
VPI / VCI	8 / 35
Connection	Disconnected <input type="button" value="Connect"/>
Connected time so far	
IP Address	
Netmask	
Gateway	

SAVE CONFIG **RESTART**

Klicka sedan på "Apply" för att spara inställningarna till modemets minne.

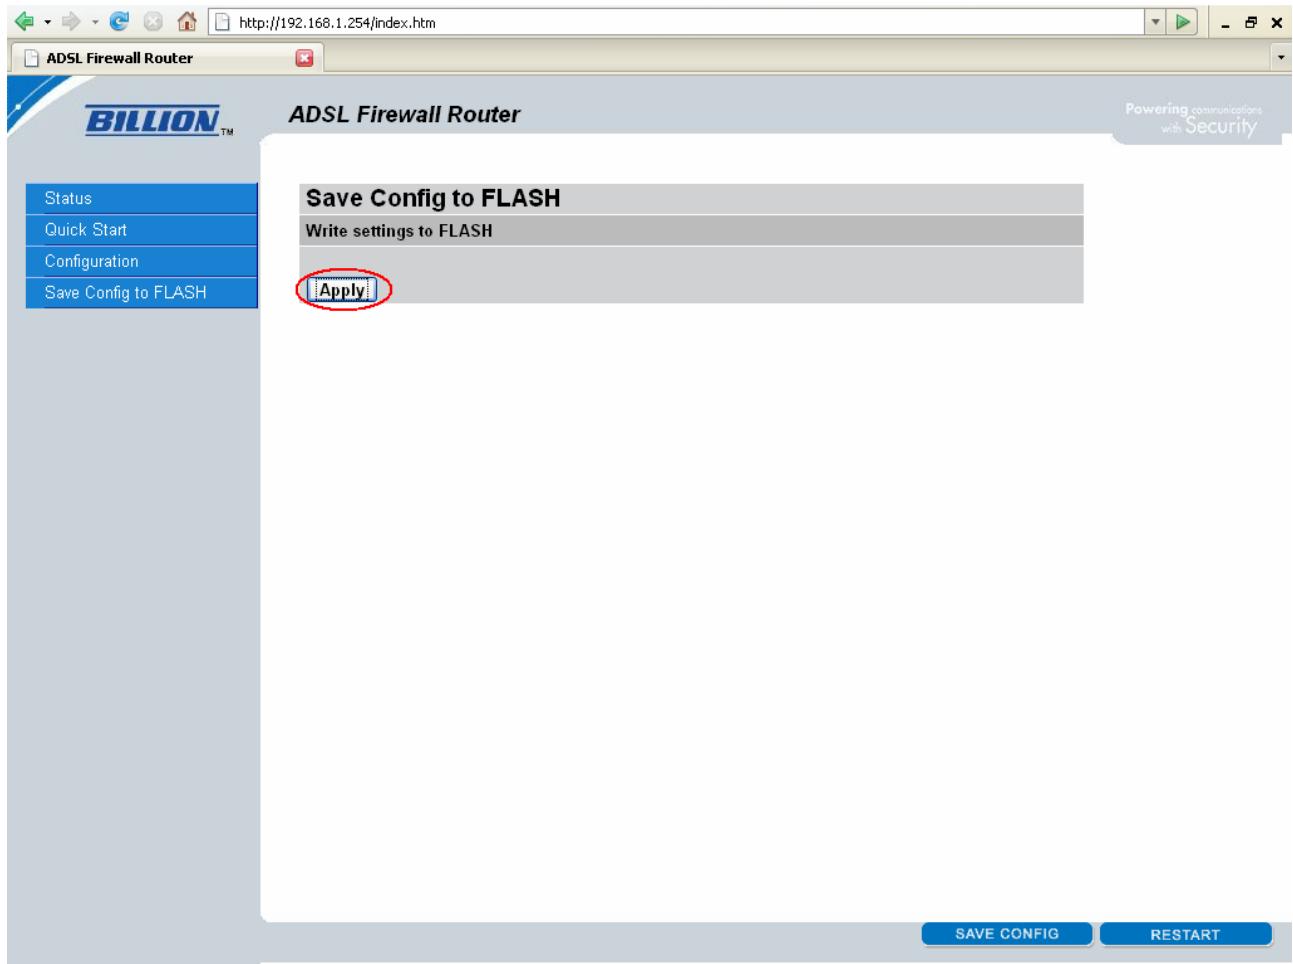

6. Inställningarna är nu sparade och modemmet är redo för att exempelvis dator eller router skall sköta anslutningen mot bredbandstjänsten.