

Billion BiPAC 7300G Fabriksåterställning av modem

Det finns två olika sätt att fabriksåterställa modemmet, genom webbgränssnitten samt en knapp på modemets baksida. Om det första inte fungerar, testa med det andra.


Fabriksåterställning via webbgränssnitt

1. Anslut till modemets webbgränssnitt genom din webbläsare via adressen <http://192.168.1.254>

Om du får upp en inloggningsruta så loggar du in med följande uppgifter:

Användarnamn: admin

Lösenord: admin

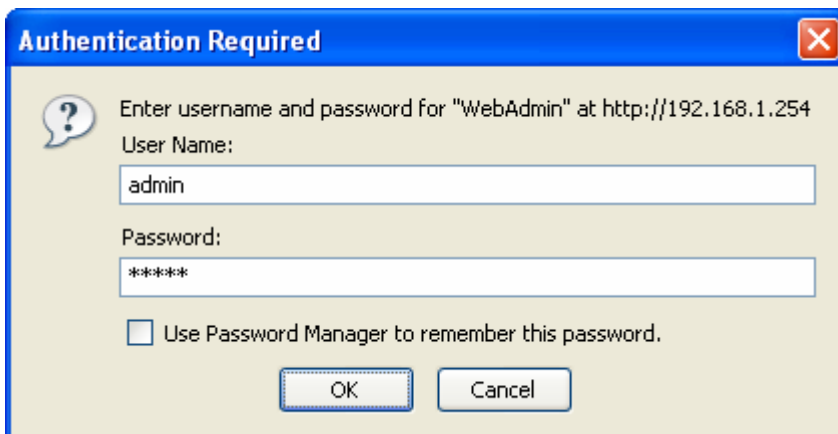

Authentication Required

Enter username and password for "WebAdmin" at <http://192.168.1.254>


User Name:
admin

Password:

Use Password Manager to remember this password.

OK Cancel

2. Klicka på knappen "Restart" längst ner till höger.

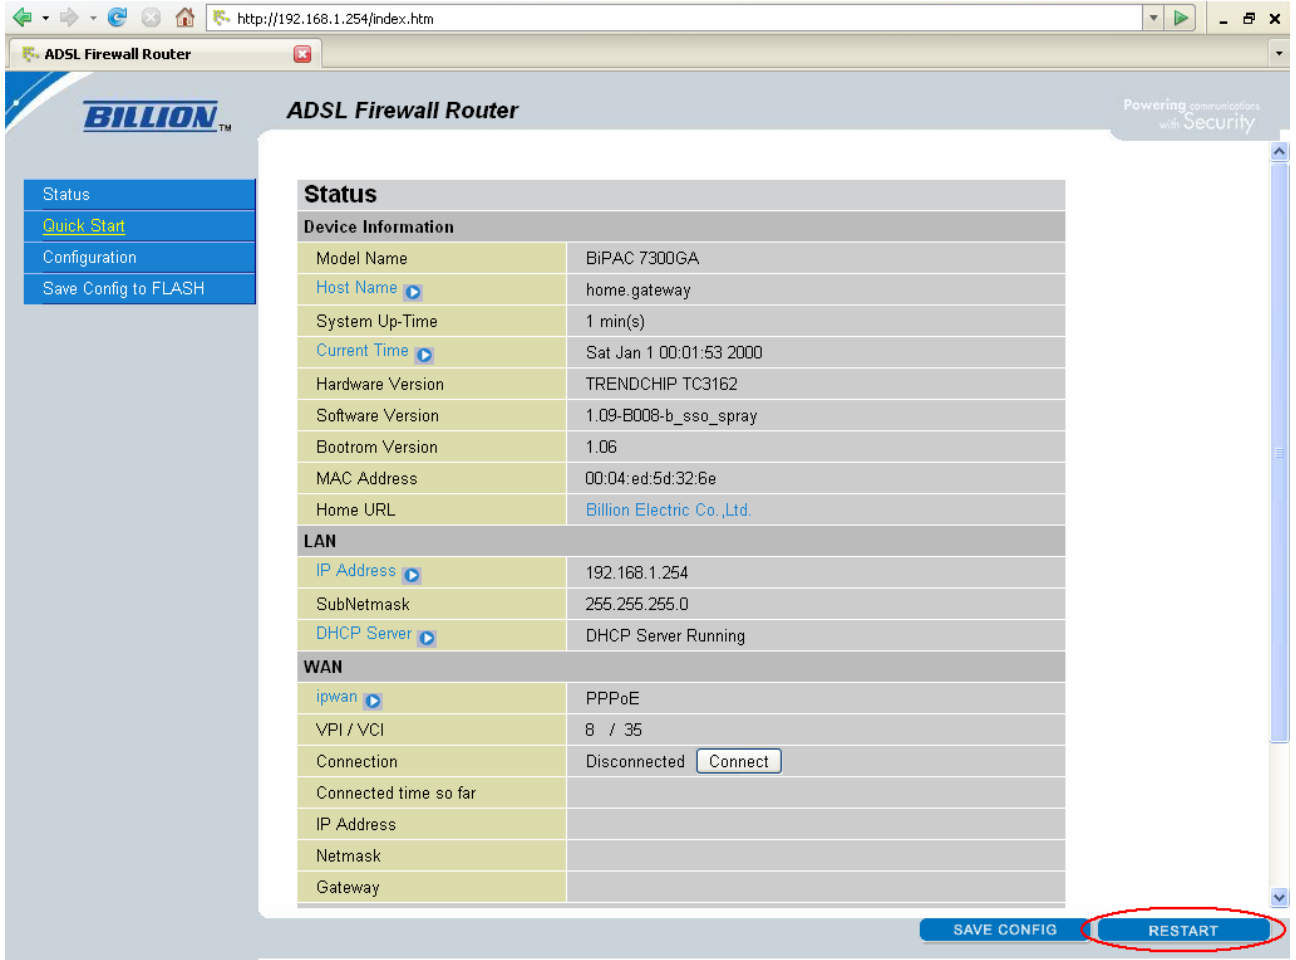

The screenshot shows the web interface of a Billion ADSL Firewall Router. The browser address bar shows `http://192.168.1.254/index.htm`. The page title is "ADSL Firewall Router" and the Billion logo is visible. A left sidebar contains navigation links: "Status" (selected), "Quick Start", "Configuration", and "Save Config to FLASH". The main content area displays the "Status" page, which is organized into sections: "Device Information", "LAN", and "WAN".


Device Information	
Model Name	BiPAC 7300GA
Host Name	home.gateway
System Up-Time	1 min(s)
Current Time	Sat Jan 1 00:01:53 2000
Hardware Version	TRENDCHIP TC3162
Software Version	1.09-B008-b_sso_spray
Bootrom Version	1.06
MAC Address	00:04:ed:5d:32:6e
Home URL	Billion Electric Co.,Ltd.

LAN	
IP Address	192.168.1.254
SubNetmask	255.255.255.0
DHCP Server	DHCP Server Running

WAN	
ipwan	PPPoE
VPI / VCI	8 / 35
Connection	Disconnected <input type="button" value="Connect"/>
Connected time so far	
IP Address	
Netmask	
Gateway	


At the bottom right of the status page, there are two buttons: "SAVE CONFIG" and "RESTART". The "RESTART" button is circled in red in the original image.

3. På denna sida väljer du "Factory Default Settings" och klickar sedan på knappen "Restart". Modemet tar nu bort alla sparade inställningar och startar om med fabriksinställningar. Detta kan ta mellan 1-2 minuter.

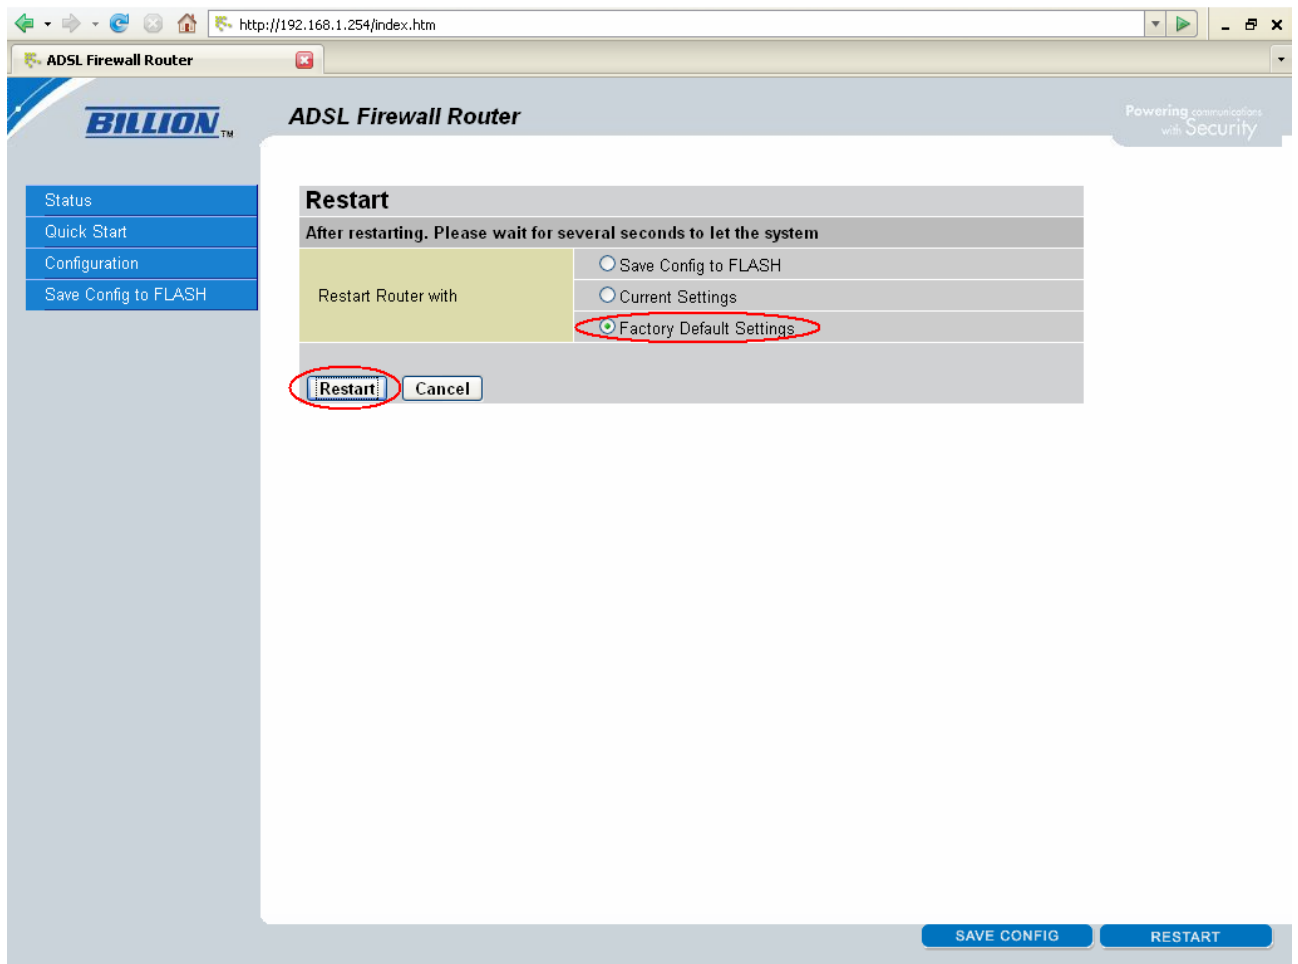


Fabriksåterställning via reset-knapp

1. Kontrollera först så att lamporna märkta "PWR" och "SYS" lyser med fast grönt sken.

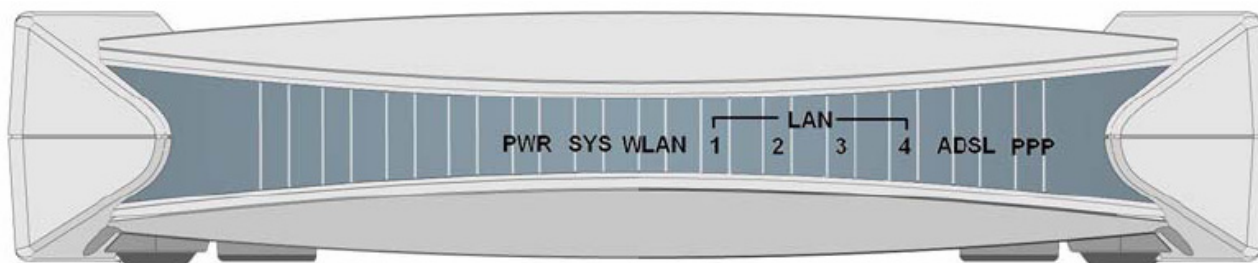

2. Tryck in knappen märkt "Reset" (2) på modemets baksida i ett par sekunder tills att lampan märkt "SYS" på modemets framsida slocknar och börjar att blinka.

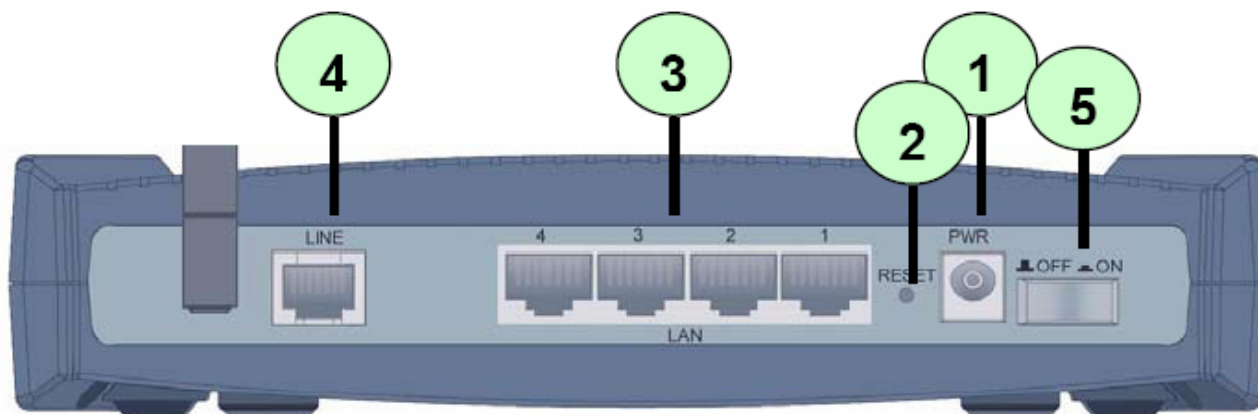

3. Modemet tar nu bort alla sparade inställningar och startar om med fabriksinställningar. När "SYS" återigen lyser med fast grönt sken har modemet startat om och är redo att användas. Detta kan ta mellan 1-2 minuter.